



ENOV (HUIZHOU) NEW ENERGY TECHNOLOGY CO., LTD

LITHIUM MOTORCYCLE STARTER BATTERY

UPGRADE SERIES

PRODUCT DATA SHEET





UPGRADE SERIES

PRODUCT CHARACTERISTICS

- Ultra-high rate 100C discharge performance;
- Wide temperature range adaptive system (-30°C to 65°C)
- Intelligent Battery Management System (BMS)
- Power display screen
- Intelligent backup power, travel worry-free
- Quick wake up, easy to use
- Low temperature heating technology

SPECIFICATIONS




Model	Voltage (V)	Capacity (Ah)	Size (L*W*H) ±2mm	Weight (Kg)	CCA (Amps)	Terminal	Alternative lead-acid battery model
EN12-M2P575	12.8	2.5	113*70*85	0.4	75	2/4	YTX4L-BS、 YTX5S-BS
EN12-M3P5105	12.8	3.5	113*70*85	0.54	105	2/4	YTX5L-BS、 YTX6 YTX7L-BS、 YTX7S
EN12-M4120	12.8	4.0	150*65*80	0.56	120	2	YT7B-BS、 YT9B-BS YT12B-BS、 YT14B-BS
EN12-M5150	12.8	5.0	150*87*93	0.78	150	2/4	YTX7A-BS、 YT7B-BS YTX9-BS、 YTZ10S-BS YT12A-B2、 YTZ12S-BS YTZ14S-BS
EN12-M6180	12.8	6.0	150*87*93	0.9	180	2/4	YTX7A-BS、 YT7B-BS YTX9-BS、 YTZ10S-BS YT12A-B2、 YTZ12S-BS、 YTZ14S-BS
EN12-M8240	12.8	8.0	150*87*130	1.2	240	2/4	YTX12-BS、 YTX14-BS YTX16-BS
EN12-M12360	12.8	12.0	175*87*155	1.65	360	4	YTX20L、 YTX20-BS YTX20H-BS、 YTX24HL-BS
EN12-M18540	12.8	18.0	166*126*175	2.5	540	4	YTX30L-BS

—OEM or ODM is available

BATTERY CELL PERFORMANCE TEST(LFP)

ROOM TEMPERATURE RATE PERFORMANCE



Test method: At normal temperature, 0.5C constant current constant voltage charge to 3.68V, cut-off current 0.05C; 1C(up to 2.5V), 40C, 45C, 50C constant discharge to 2.0V.

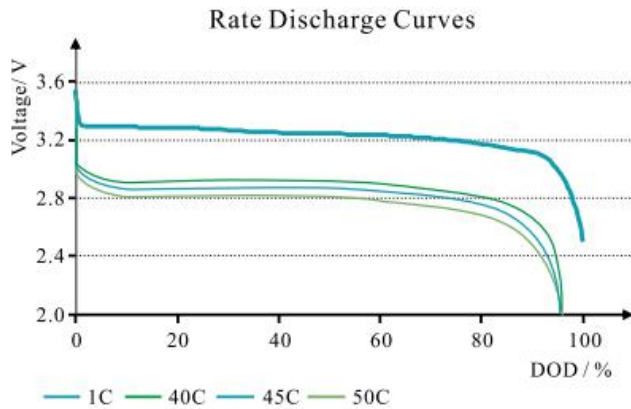

Magnification	1C	40C	45C	50C
Median voltage /V	3.244	2.886	2.852	2.807
Capacity retention rate /%	100.0	94.9	95.9	94.8

PULSE DISCHARGE PERFORMANCE AT ROOM TEMPERATURE


Test method: Under normal temperature, 0.5C constant current constant voltage charge to 3.68V, cut-off current 0.05C; Discharge at 260C pulse for 1s, 190C pulse for 2s.

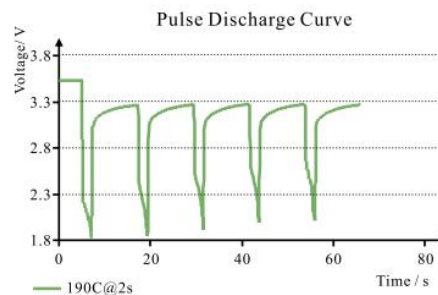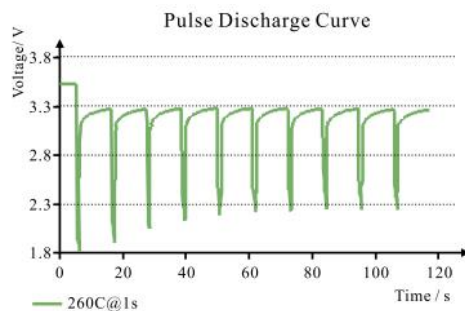

Pulse magnification @ time	Low head voltage /V
260C@1S	1.811
190C@2S	1.879

HIGH TEMPERATURE STORAGE


Test method: At room temperature, 0.5C constant current constant voltage charge to 3.68V, cut-off current 0.05C; After being stored at 65°C for 7d and 85°C for 24h, the current was discharged to 2.5V at 1C. Then charge 1C at 0.5C, cycle 3 times, record the internal resistance, thickness and capacity of the battery before and after storage.

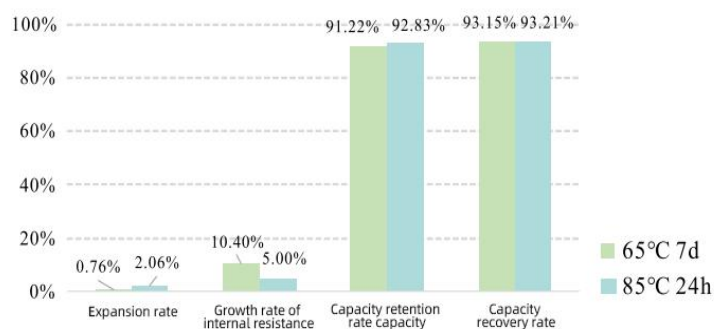

BATTERY CELL PERFORMANCE TEST (LFP)

◆ LOW TEMPERATURE PERFORMANCE


Test method: Under normal temperature, 0.5C constant current constant voltage charge to 3.68V, cut-off current 0.05C; Set aside at the test temperature for 4~8h, and discharge to 1.5V at the corresponding magnification respectively.

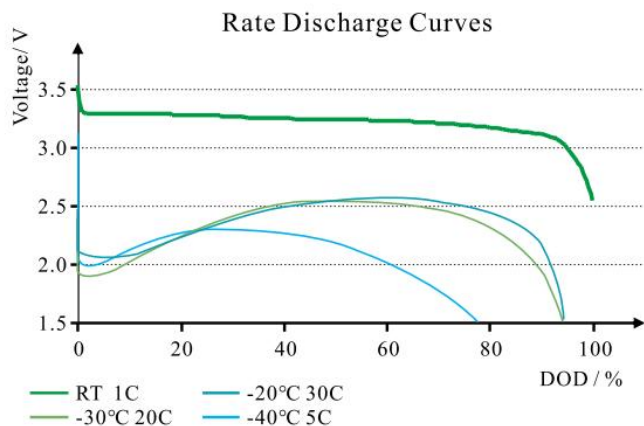

Temperature / °C	RT	-20°C	-30°C	-40°C
Magnification	1C	30C	20C	5C
Median voltage /V	3.244	2.637	2.591	2.276
The inflection point /V	—	2.105	1.856	1.931
Capacity retention rate /%	100.0	95.4	94.1	76.5

◆ NORMAL TEMPERATURE CYCLE

Test method: At room temperature, charge to 3.68V at 1C constant current and constant pressure, cut-off current is 0.05C; Let stand for 10min; 2C constant current discharge to 2.5V; Do a loop test.

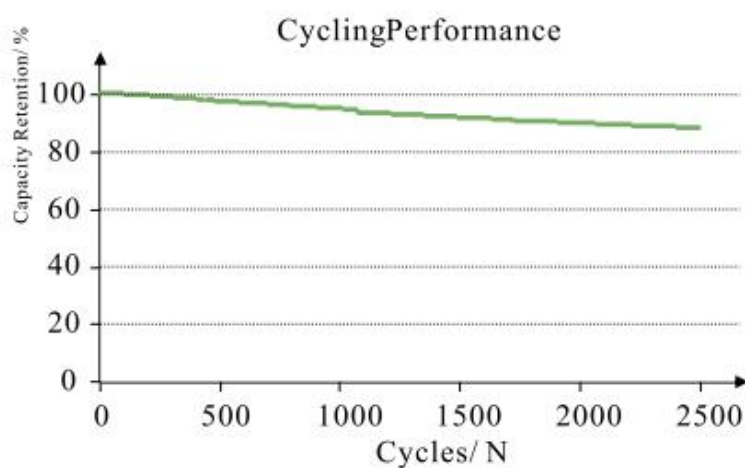

Cycle number	Capacity retention rate /%	Median voltage /V
1	100.00	3.192
100	100.46	3.207
300	99.32	3.214
500	98.03	3.212
700	96.94	3.211
1000	95.33	3.210
1300	93.18	3.204
1500	92.34	3.203
1700	91.55	3.202
2000	90.35	3.200
2300	89.27	3.198
2500	88.61	3.197

WARRANTY PERIOD OF CELL

Enov provides a one-year warranty on the battery (starting from the date of manufacture). During the warranty period, if there is a performance failure or complete failure of the battery caused by non-human, it is confirmed by our technical department that it is a quality problem such as raw material defects and production process defects, and there is no abnormal use such as private disassembly, improper storage (ambient temperature over 60°C or below -20°C), physical impact, liquid immersion, etc. Customers can apply for free replacement of new battery units of the same model through the official customer service channels with valid purchase vouchers and complete product serial number labels.

STORAGE AND SHIPMENT REQUIREMENT

Item	Requirement	Remark
Storage temperature	≤ 1 month: -20°C~45°C ≤ 3 month: -20°C~30°C ≤ 1 year: $23 \pm 2^\circ\text{C}$	The best temperature in shipment is $23 \pm 5^\circ\text{C}$
Humidity	$\leq 75\% \text{RH}$	/
Charged Capacity	50%-100%	Voltage 13.2-14.6V
1.The storage temperature should be controlled at -20°C~40°C, away from open flame, corrosive substances and humid environment. 2.Do not charge in a sealed, high temperature ($> 40^\circ\text{C}$) or low temperature ($< -5^\circ\text{C}$) environment to avoid abnormal reaction of the electrolyte. 3.Do not reverse connect the positive and negative terminals; otherwise, short circuit or device damage may occur. 4.If the volume of the lithium battery is smaller than that of the original battery, secure the battery using the provided base or foam to ensure stable installation. 5.When storing, it is important to avoid external vibrations and collisions as much as possible to avoid short circuits inside the battery or damage to the metal casing.		

USE WARNINGS AND CAUTIONS

WARNINGS!

The cell will fire, explode or leak if not strictly observing this item described below.

- ◆ Do not immerse the cell in water or seawater, and keep the cell in a cool dry environment during stands by period.
- ◆ Do not mix using the cell with one-off cell (such as dry cell) or different performance together.
- ◆ Keep all batteries out of the reach of little children. Consult a doctor immediately if a cell is swallowed.
- ◆ Do not use or leave the cell near a heat source such as fire or heater
- ◆ When re-charging , use the cell charger specifically for that purpose.
- ◆ Do not reverse the positive (+) and negative (-) terminals.
- ◆ Do not connect the cell to an electrical outlet.
- ◆ Do not dispose the cell in fire or heat.
- ◆ Do not short-circuit the cell by directly connecting the positive (+) and negative (-) terminals with metal objects such as wire.
- ◆ Do not transport or store the cell together with metal objects such as necklaces, hairpins etc.
- ◆ Do not strike or throw the cell against hard surface.
- ◆ Do not directly solder the cell .
- ◆ Do not pierce the cell with a nail or other sharp object.
- ◆ Never disassembling the cell in any way.

CAUTIONS!

- ◆ Do not use or leave the cell at very high temperature (for example, at strong direct sunlight or in a vehicle in extremely hot weather). Otherwise, it can overheat or fire or its performance will be degenerate and its service life will be shortened.
- ◆ Do not use it in a location where static electricity is rich, otherwise, the safety devices may be damaged, causing a harmful situation.
- ◆ In case the electrolyte getting into the eyes due to the leakage of cell, do not rub the eyes! Rinse the eyes with clean running water, and seek medical attention immediately. Otherwise, it may injure eyes or cause a loss of sight.
- ◆ If the cell gives off an odor, generates heat, becomes discolored or deformed, or in anyway appear abnormal during use, recharging or storage, immediately remove it from the device or cell charger and place it in a contained vessel such as a metal box.
- ◆ In case the cell terminals are contaminated, clean the terminals with a dry cloth before use. Otherwise power failure or charge failure may occur due to the poor connection between the cell and the electronic circuitry of the instrument.
- ◆ Be aware discarded batteries may cause fire, 100%discharged the cell and tape the cell terminals to insulate them before disposal.

APPLICATION SCENARIO

		
SUITABLE FOR SCOOTER	ROAD MOTORCYCLE	ATV
		
SNOWMOBILE	JET SKI	UTV

CERTIFICATION

				
ISO 14001	ISO 9001	ROHS	CE	FC

CONTACT US



Address: Room 403, 4th Floor, Building B1, No. 108 Dongxin Avenue, Dongxing Area, Dongjiang Hi-Tech Zone, Huizhou, China



Email: info@enovbattery.com



Whats app: +86-177 2295 9228