



ENOV (HUIZHOU) NEW ENERGY TECHNOLOGY CO., LTD

UAV DRONE BATTERY

EXTRA HIGH ENERGY SEMI-SOLID BATTERY (EXE)

PRODUCT DATASHEET

INDUSTRIAL BATTERY





PRODUCT CHARACTERISTICS

- Ultralight, Capacity Increase 20%+.
- Ultra-high Energy Density 320Wh/kg+.
- Cont. Discharge, 3C+.
- Burst Discharge 10C+.
- Semi-solid Polymer.
- Wide temperature range work well form: -20°C to 60°C.




SPECIFICATIONS

Model	Capacity	Series	Size(L*W*H)±2mm	Weight (g)	C rating
EN-17A022S-EXE	17000mAh	22.2V 6S1P	51*74*180	1500	10C
EN-17A044T-EXE		44.4V 6S1P	100.5*74*180	1850	
EN-17A051F-EXE		51.8V 14S1P	116.5*74*180	3300	
EN-17A066E-EXE		66.6V 18S1P	149.5*74*180	4200	
EN-22A022S-EXE	22000mAh	22.2V 6S1P	63.5*74*180	1915	10C
EN-22A044T-EXE		44.4V 6S1P	125.5*74*180	3680	
EN-22A051F-EXE		51.8V 14S1P	146.5*74*180	4260	
EN-22A066E-EXE		66.6V 18S1P	187.5*74*180	5440	
EN-25A022S-EXE	25000mAh	22.2V 6S1P	42*107*240	2390	10C
EN-25A044T-EXE		44.4V 6S1P	82.5*107*240	4630	
EN-25A051F-EXE		51.8V 14S1P	96*107*240	5380	
EN-25A066E-EXE		66.6V 18S1P	122.5*107*240	6880	
EN-27A022S-EXE	27000mAh	22.2V 6S1P	60.5*89*200	2340	10C
EN-27A044T-EXE		44.4V 6S1P	119.5*89*200	4530	
EN-27A051F-EXE		51.8V 14S1P	139.5*89*200	5260	
EN-27A066E-EXE		66.6V 18S1P	178.5*89*200	6720	
EN-30A022S-EXE	30000mAh	22.2V 6S1P	66.5*89*200	2580	10C
EN-30A046T-EXE		44.4V 6S1P	131.5*89*200	5020	
EN-30A053F-EXE		51.8V 14S1P	153*89*200	5830	
EN-30A066E-EXE		66.6V 18S1P	196.5*89*200	7450	
EN-40A022S-EXE	40000mAh	22.2V 6S1P	64.5*107*240	3610	10C
EN-40A044T-EXE		44.4V 6S1P	126*107*240	7080	
EN-40A051F-EXE		51.8V 14S1P	147.5*107*240	8240	
EN-40A066E-EXE		66.6V 18S1P	189*107*240	10550	

BATTERY CELL PERFORMANCE TEST

◆ BASIC CHARGE AND DISCHARGE PERFORMANCE


Test method: Under normal temperature, 0.5C constant current constant voltage charge to 4.35V, cut-off current 0.05C; Let it sit for 10min and then drain it to 2.5V at 0.5C.

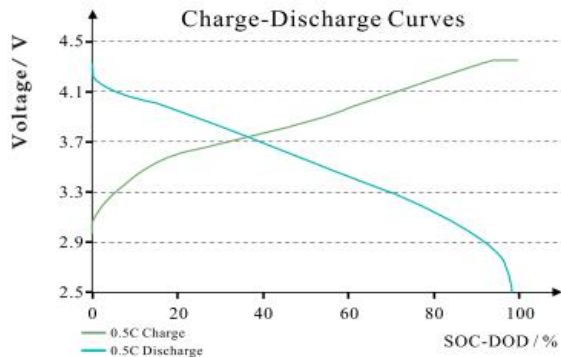

Item	0.5C charging capacity /Ah	0.5C discharge capacity /Ah	Charge and discharge efficiency /%
Test value	32.1	31.6	98.5

◆ LOW TEMPERATURE DISCHARGE -40°C


Test method: Under normal temperature, 0.5C constant current constant voltage charge to 4.35V, cut-off current 0.05C; At -40°C for 4~6h, and then at 0.2C, 0.5C constant discharge to 2.4V.

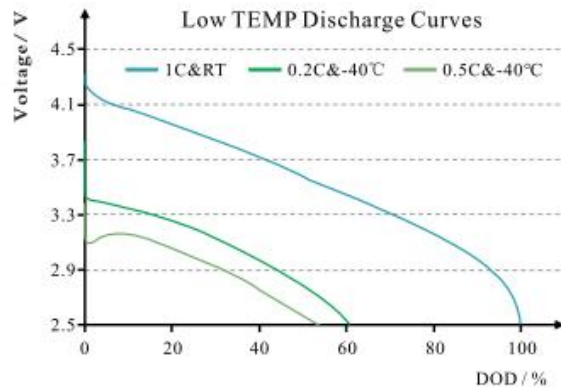

Temperat ure	Rate of multiplic ation	Capacit y/Ah	Median voltage /V	Capacity retention rate /%
RT	1C	31.65	3.569	100.00
-40°C	0.2C	19.82	3.103	62.62
-40°C	0.5C	18.43	2.939	58.23

◆ HIGH TEMPERATURE STORAGE


Test method: At room temperature, 0.5C constant current constant voltage charge to 4.2V, cut-off current 0.05C; After being stored at 60°C for 7d, 70°C for 24h and 70°C for 48h, the current was discharged to 3.0V at 1C. Then charge 1C at 0.5C, cycle 3 times, record ACR, thickness, capacity before and after storage.

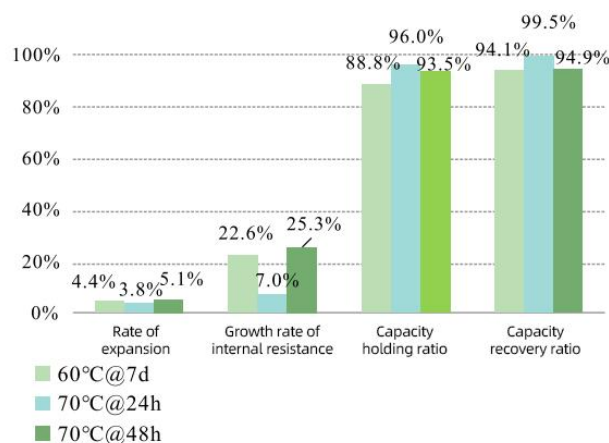

BATTERY CELL PERFORMANCE TEST

◆ RATE DISCHARGE RT

Test method: Under normal temperature, 0.5C constant current and constant voltage charge to 4.35V, cut-off current 0.05C; Put it on for min, and then discharge it to 2.5V at 0.2C, 0.5C, 1C, 3C and 5C.

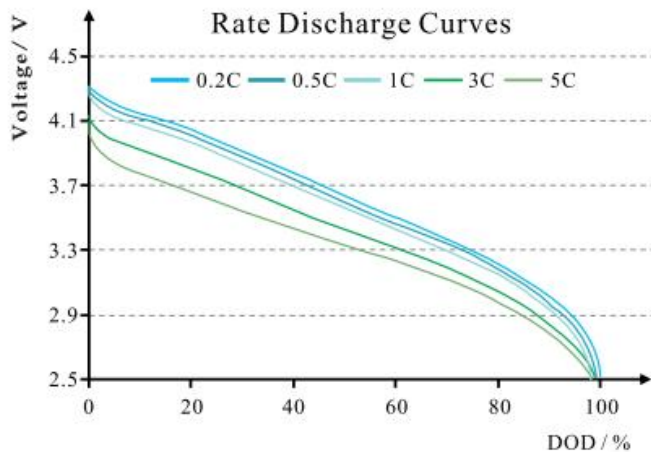


Rate of multiplication	Capacity /Ah	Median voltage /V	Capacity retention rate /%
0.2C	32.22	3.619	100.00
0.5C	31.88	3.603	98.9
1C	31.71	3.569	98.4
3C	31.93	3.430	99.1
5C	31.77	3.339	98.6

◆ LOOP PERFORMANCE RT

Test method a: Under normal temperature, 1C constant current and constant voltage charge to 4.35V, cut-off current 0.05C; leave for 15min, then 2C constant discharge to 2.75V, do cycle test.

Test method a: Under normal temperature, 2C constant current and constant voltage charge to 4.35V, cut-off current 0.05C; leave for 15min, then 3C constant discharge to 2.75V, do cycle test.

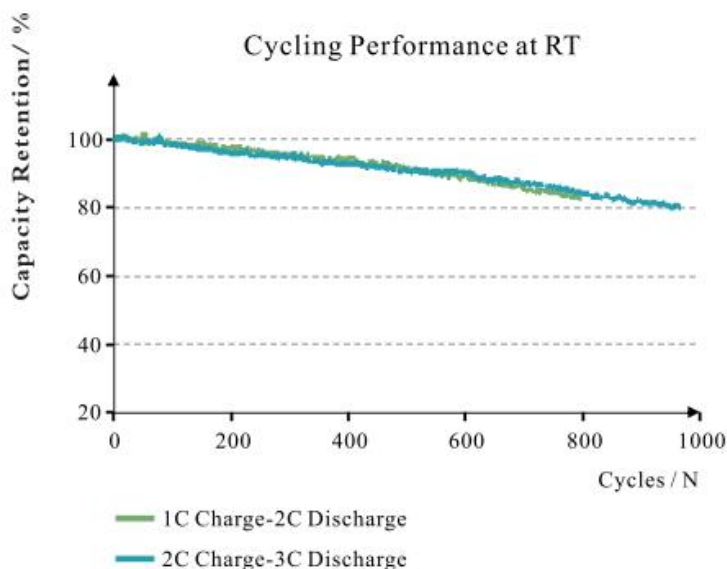

Cycle number	1C charge 2C discharge	2C charge 3C discharge
1	100.0	100.0
100	99.0	98.6
200	98.0	95.9
300	95.6	95.1
400	94.6	93.0
500	91.5	91.1
600	89.7	90.3
700	85.8	86.8
800	82.9	84.2
900	/	81.
1000	/	80.3(966th)

WARRANTY PERIOD OF CELL

Enov provides a one-year warranty on the battery (starting from the date of manufacture). During the warranty period, if there is a performance failure or complete failure of the battery caused by non-human, it is confirmed by our technical department that it is a quality problem such as raw material defects and production process defects, and there is no abnormal use such as private disassembly, improper storage (ambient temperature over 60°C or below -20°C), physical impact, liquid immersion, etc. Customers can apply for free replacement of new battery units of the same model through the official customer service channels with valid purchase vouchers and complete product serial number labels.

STORAGE AND SHIPMENT REQUIREMENT

Item	Requirement	Remark
Storage temperature	≤ 1 month: -20°C~45°C ≤ 3 month: -20°C~30°C ≤ 1 year: $23 \pm 2^\circ\text{C}$	The best temperature in shipment is $23 \pm 5^\circ\text{C}$
Humidity	$\leq 75\% \text{RH}$	/
Charged Capacity	50%-100%	Voltage 13.2-14.6V
1.The storage temperature should be controlled at -20°C~40°C, away from open flame, corrosive substances and humid environment. 2.Do not charge in a sealed, high temperature ($> 40^\circ\text{C}$) or low temperature ($< -5^\circ\text{C}$) environment to avoid abnormal reaction of the electrolyte. 3.Do not reverse connect the positive and negative terminals; otherwise, short circuit or device damage may occur. 4.If the volume of the lithium battery is smaller than that of the original battery, secure the battery using the provided base or foam to ensure stable installation. 5.When storing, it is important to avoid external vibrations and collisions as much as possible to avoid short circuits inside the battery or damage to the metal casing.		

USE WARNINGS AND CAUTIONS

WARNINGS!


The cell will fire, explode or leak if not strictly observing this item described below.

- ◆ Do not immerse the cell in water or seawater, and keep the cell in a cool dry environment during stands by period.
- ◆ Do not mix using the cell with one-off cell (such as dry cell) or different performance together.
- ◆ Keep all batteries out of the reach of little children. Consult a doctor immediately if a cell is swallowed.
- ◆ Do not use or leave the cell near a heat source such as fire or heater
- ◆ When re-charging , use the cell charger specifically for that purpose.
- ◆ Do not reverse the positive (+) and negative (-) terminals.
- ◆ Do not connect the cell to an electrical outlet.
- ◆ Do not dispose the cell in fire or heat.
- ◆ Do not short-circuit the cell by directly connecting the positive (+) and negative (-) terminals with metal objects such as wire.
- ◆ Do not transport or store the cell together with metal objects such as necklaces, hairpins etc.
- ◆ Do not strike or throw the cell against hard surface.
- ◆ Do not directly solder the cell .
- ◆ Do not pierce the cell with a nail or other sharp object.
- ◆ Never disassembling the cell in any way.

CAUTIONS!

- ◆ Do not use or leave the cell at very high temperature (for example, at strong direct sunlight or in a vehicle in extremely hot weather). Otherwise, it can overheat or fire or its performance will be degenerate and its service life will be shortened.
- ◆ Do not use it in a location where static electricity is rich, otherwise, the safety devices may be damaged, causing a harmful situation.
- ◆ In case the electrolyte getting into the eyes due to the leakage of cell, do not rub the eyes! Rinse the eyes with clean running water, and seek medical attention immediately. Otherwise, it may injure eyes or cause a loss of sight.
- ◆ If the cell gives off an odor, generates heat, becomes discolored or deformed, or in anyway appear abnormal during use, recharging or storage, immediately remove it from the device or cell charger and place it in a contained vessel such as a metal box.
- ◆ In case the cell terminals are contaminated, clean the terminals with a dry cloth before use. Otherwise power failure or charge failure may occur due to the poor connection between the cell and the electronic circuitry of the instrument.
- ◆ Be aware discarded batteries may cause fire, 100%discharged the cell and tape the cell terminals to insulate them before disposal.

APPLICATION SCENARIO

		
EXPLORATION UAV	eVTOL	PLANT PROTECTION UAV
		
LOGISTICS TRANSPORT UAV	MAPPING UAV	FPV UAV

CERTIFICATION

				
ISO 14001	ISO 9001	ROHS	CE	FC

CONTACT US



Address: Room 403, 4th Floor, Building B1, No. 108 Dongxin Avenue, Dongxing Area, Dongjiang Hi-Tech Zone, Huizhou, China



Email: info@enovbattery.com



Whats app: +86-13392026914